




TYPE U DUCTILE IRON PIPES AND FITTINGS

U 型延性鑄鐵管及管件

U 型延性鑄鐵直管

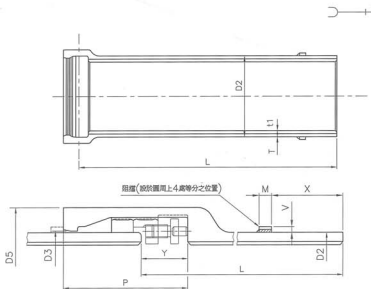

■ 接合部詳細

單位: mm

標稱管徑	管	厚	內徑	外徑	各部尺寸										有效長度	質量(kg)													
D	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5	t1	D2	D3	D5	P	Y	M	V	X	L	承口凸出部	距槽凸出部	D1	D1.5	D2	D2.5	D3	D3.5	D4	D4.5	內襯
700	12.0	-	11.0	-	10.0	-	9.0	-	8	733	728	831	265	105	25	16	160	6000	161	0.942	1310	-	1210	-	1120	-	1020	-	249
800	13.5	-	12.0	-	11.0	-	10.0	-	8	836	841	938	265	105	25	16	160	6000	197	0.942	1670	-	1510	-	1400	-	1290	-	285
900	15.0	-	13.0	-	12.0	-	11.0	-	8	939	944	1043	265	105	25	16	160	6000	231	0.942	2070	-	1830	-	1700	-	1590	-	329
1000	16.5	-	14.5	-	13.0	-	12.0	-	10	1041	1047	1151	270	105	25	16	165	6000	276	0.942	2520	-	2250	-	2050	-	1910	-	444
1100	18.0	-	15.5	-	14.0	-	13.0	-	10	1144	1150	1258	270	105	25	16	165	6000	324	0.942	3010	-	2640	-	2420	-	2270	-	488
1200	19.5	-	17.0	-	15.0	-	13.5	-	10	1246	1252	1362	270	105	25	16	165	6000	365	0.942	3530	-	3130	-	2810	-	2570	-	532
1300	21.5	-	18.5	-	16.5	-	15.0	-	12	1400	1406	1521	280	105	25	16	175	6000	451	0.942	4380	-	3840	-	3470	-	3200	-	717
1500	23.5	-	20.5	-	18.0	-	16.5	-	12	1554	1560	1679	285	105	25	16	180	6000	541	0.942	5300	-	4700	-	4200	-	3900	-	797
1600	25.0	23.5	22.0	20.5	19.0	18.0	17.5	16.0	15	1650	1656	1784	295	115	25	16	180	5000	640	0.942	5100	4840	4570	4310	4040	3860	3700	3510	876
1650	25.5	24.0	22.5	21.0	19.5	18.5	18.0	16.5	15	1701	1707	1829	295	115	25	16	180	5000	678	0.942	5370	5100	4820	4550	4280	4090	4000	3730	903
1800	28.0	26.0	24.0	22.5	21.0	20.0	19.5	18.0	15	1848	1854	1990	295	115	25	16	180	5000	779	0.942	6370	5900	5580	5290	4990	4790	4690	4390	982
2000	30.5	28.5	26.5	25.0	23.5	22.0	21.0	19.5	15	2061	2067	2209	300	115	25	16	185	5000	951	0.942	7750	7310	6870	6540	6210	5870	5650	5320	1100
2100	32.0	30.0	28.0	26.0	24.5	23.0	22.0	20.5	15	2164	2170	2314	305	115	25	16	190	5000	1038	0.942	8530	8060	7600	7140	6790	6440	6210	5860	1150
2200	33.5	31.0	29.0	27.0	25.5	24.0	23.0	21.5	15	2280	2286	2433	310	115	25	16	195	5000	1141	0.942	9400	8790	8300	7820	7450	7080	6840	6470	1210
2400	36.5	34.0	31.5	29.5	27.5	26.0	25.0	23.0	15	2458	2464	2617	320	115	25	16	205	4000	1331	0.942	9050	8520	8000	7580	7140	6850	6640	6220	1940
2600	39.5	36.5	34.0	31.5	29.5	28.0	27.0	25.0	15	2684	2690	2845	395	130	32	19	265	4000	1920	2.410	11010	10320	9740	9190	8730	8390	8160	7700	1130

◎ 備考: 1. 承口凸出部之質量為修整至有效數字者, 故其總合與1支之總質量未必一致。

2. 承口內面之形狀, 可依虛線之形狀。